



DIRT QUAD CONTROL MODULE INSTALLATION INSTRUCTIONS

Kit Contents:

- 1 - Control Module
- 1 - 3mm Allen Wrench
- 1 - 5mm Allen Wrench
- 1 - 6mm Allen Wrench
- 1 - No. 10 Open Wrench



The control module is located inside the battery cover.

⚠ WARNING: Turn off the main power switch and disconnect charger before proceeding with the following instructions.

Step 1:

Use the front carry handle to carefully lift Dirt Quad up on end (unit should be standing in the upright position with rear wheels on the ground). Using a 3mm Allen wrench, remove the 2 bolts on the support bracket (Figure 1). Using the front carry handle, slowly lower the Dirt Quad back down to the ground. Save bolts for reassembly.

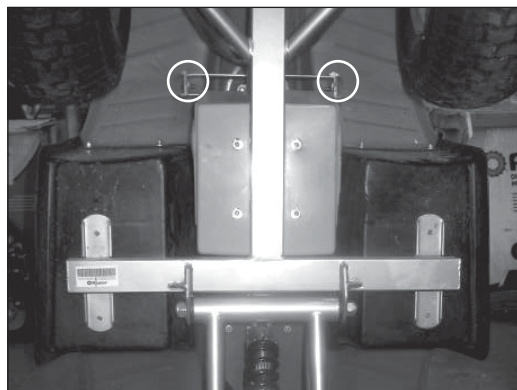


Figure 1

Step 2:

Using a 6mm Allen wrench, remove the 4 bolts on the handlebar clamps and detach handlebars. (Figure 2)

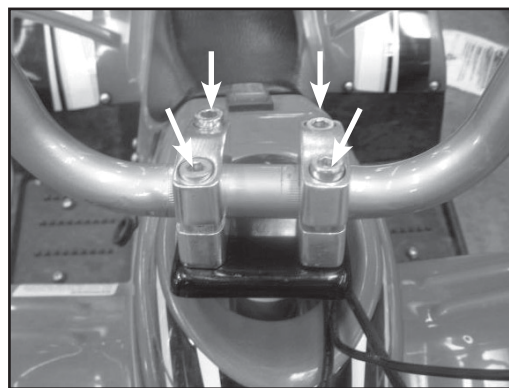


Figure 2

Step 3:

Using a 5mm Allen wrench, remove the 4 bolts (2 on each side) on both sides of the footrest platforms. (Figure 3)



Figure 3

Step 4:

Using a # 10 open wrench, remove the 2 bolts underneath the rear fender. (Figure 4)

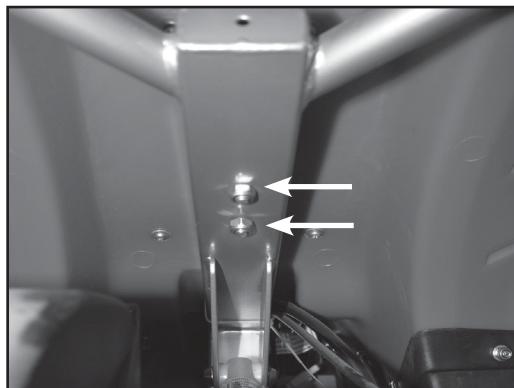


Figure 4

Step 5:

Lift up the plastic body (Figure 5a). Carefully maneuver it around the top of the steering tube (Figure 5b) in order to remove the body.

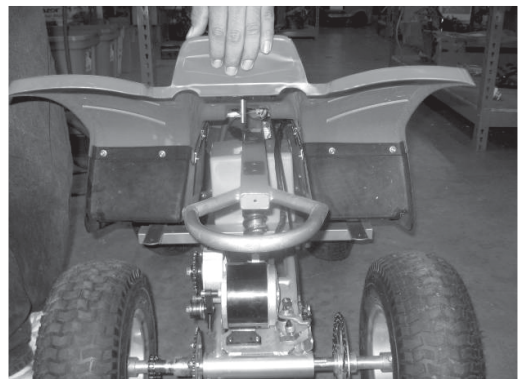


Figure 5a

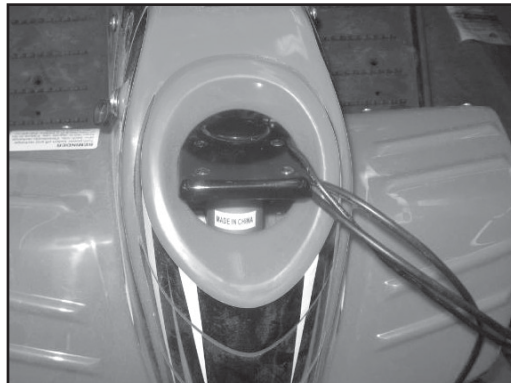


Figure 5b

Step 6:

Carefully unplug the 5 plastic connections attached to the controller. Each connector is a snap-lock type connection that requires depressing a small tab to allow the connector to release (Figure 8). Do not attempt to disconnect by pulling on the wires!

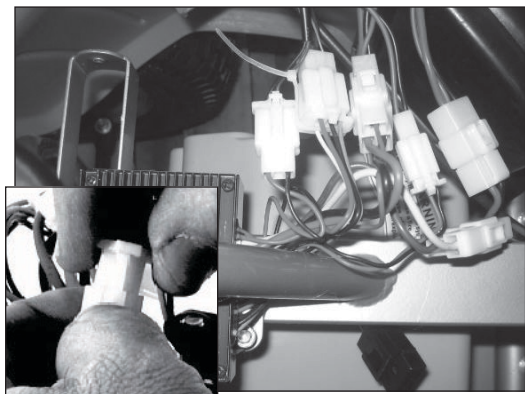


Figure 8

Step 7:

Using a 5mm allen wrench, unscrew the 2 Allen bolts and remove the control module (Figure 9).

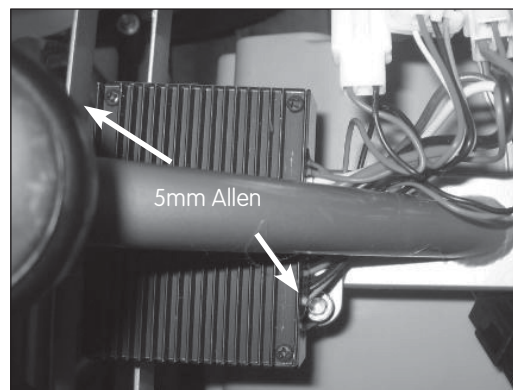


Figure 9



DISPOSAL: Your controller must be recycled or disposed of in an environmentally sound manner. Do not dispose of controller in your regular household trash. Return controller to a federal or state approved recycler.

Step 8:

1. Install the new control module by attaching it to the frame using the 2 Allen bolts.
2. Re-connect the (5) plastic connectors.

***Note:** Check that all connectors are securely attached, especially to the power switch as it is possible connector(s) may become detached when lifting up the plastic body.

3. Re-attach the battery cover.
4. Lower the plastic body back down over the main frame and re-fasten the 2 bolts to the rear fender.
5. Re-fasten the 4 bolts on both of the footrest platforms.
6. Re-attach the handlebars.
7. Lift Dirt Quad up and re-fasten the bolts to the battery cover and support bracket.
8. Carefully lower Dirt Quad back down; installation complete.